



Simplex Patchcord Fibre

(MM 62)


REF: 3375

(MM50)

REF: 3376

(SM)

REF: 3377



Cable description

- 01. Tight buffer fibre (0.9 mm)
- 02. Aramid yarns
- 03. Outer thermoplastic jacket

Fire resistance

Flame retardant
Low smoke emission

Applications

Indoor
Pigtail and jumper connections
Direct connection to terminal equipments
Based on DIN VDE 0888 Part 4

Options

Jackets: LSZH

Advantages

Flexible / Resilient /
Totally dielectric / Direct
connectorization.



SPECIFICATIONS

Fibres	1
Strength members	Aramid Yarns
Outer jacket	FRLS ¹
Identification	Orange (MM62) / Blue (MM50) / Yellow (SM)
Weight (Kg/Km)	7.5
Outer Ø (mm)	2.9 ± 0.1
Tensile Load (N)	200
Temperature Range	-5 °C to +60 °C
Min. Bending Radius	10 x Outer Ø
Max. Length	2000 m

Standards

Environmental and mechanical tests according to EN 187000 and CEI 60794
Fire test according to: UNE-EN 50265 (IEC 60332-1) / UNE-EN 50268 (IEC 61034-1/2).
¹FRLS – Special PVC heavy metals free, low halogen and low smoke emission and flame retardant.

Duplex Patchcord Fibre

(MM 62)


REF: 3378

(MM50)

REF: 3379

(SM)

REF: 3380

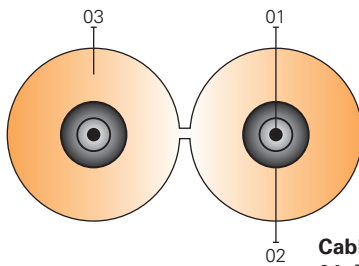

Cable description

- 01. Tight buffer duplex (0.9 mm)
- 02. Aramid yarns
- 03. Outer thermoplastic jacket

Fire resistance

Flame retardant
Low smoke emission

Applications


Jumper and pigtail connections
Direct connection to terminal equipments
Based on DIN VDE 0888 part 4

Options

Jackets: LSZH
Special colour code

Advantages

Flexible / Resilient /
Totally dielectric / Direct
connectorization.

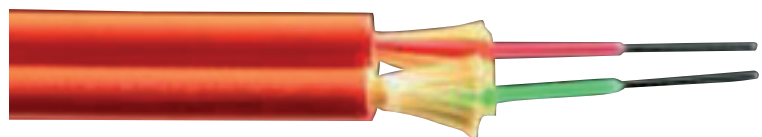

SPECIFICATIONS

Fibres	2
Identification	Colours
Strength members	Aramid Yarns
Outer jacket	FRLS ¹
Identification	Orange (MM62) / Blue (MM50) / Yellow (SM)
Weight (Kg/Km)	15
Outer Ø (mm)	2.9 x 6.3 ± 0.1
Tensile Load (N)	400
Temperature Range	-5 °C to +60 °C
Min. Bending Radius	15 x Outer Ø
Max. Length	2000 m

Standards

Environmental and mechanical tests according to EN 187000 and CEI 60794
Fire test according to: UNE-EN 50265 (IEC 60332-1) / UNE-EN 50268 (IEC 61034-1/2).
Fibres colour code: red, green
¹FRLS – Special PVC heavy metals free, low halogen and low smoke emission and flame retardant